

# Glostertube

s.a.s. di A.Rizzato & C.

Via dell' Artigianato, 2 – 20090 Vimodrone (MI) – Italia tel. +39 022650402 fax +39 022650569 Pagina web: www.glostertube.com



## Softlite – cod. n. 126

|                   |             |                   |                        |
|-------------------|-------------|-------------------|------------------------|
| Luminanza propria | luminance   | luminance propre: | 3030 cd m <sup>2</sup> |
| Flusso Lineare    | linear flux | flux linéique:    | 370 lm/m               |

### Dati colorimetrici – chromatic data - chromaticité

|    |        |
|----|--------|
| x  | 0,4554 |
| y  | 0,4125 |
| u' | 0,2588 |
| v' | 0,5274 |

|                        |                         |                                  |             |
|------------------------|-------------------------|----------------------------------|-------------|
| Purezza**              | purity**                | pureté**                         | n.d. / n.a. |
| Dominante              | dominant                | dominante                        | 583 nm      |
| Indice di resa colore* | colour rendering index* | indice de rendu de couleurs IRC* | 82          |
| Temperatura colore*    | colour temperature*     | température de couleur K*        | 2780 K      |

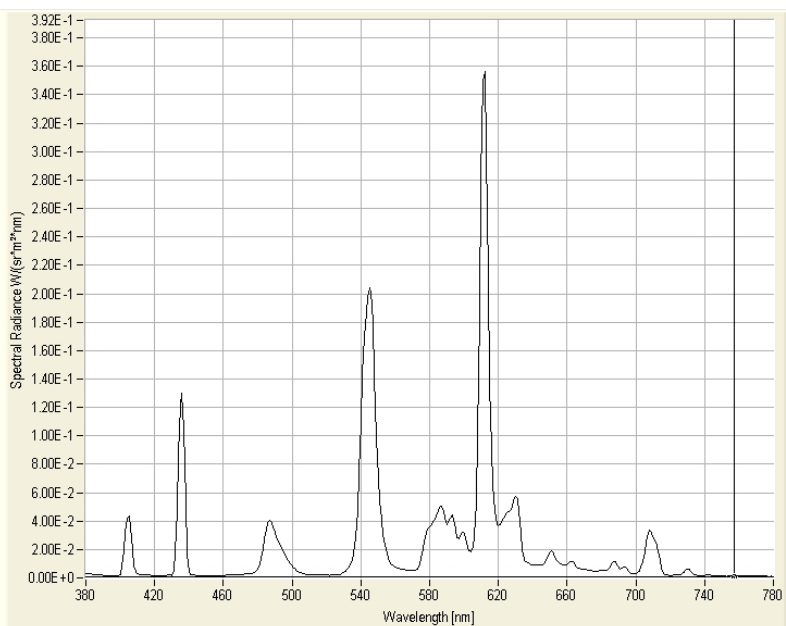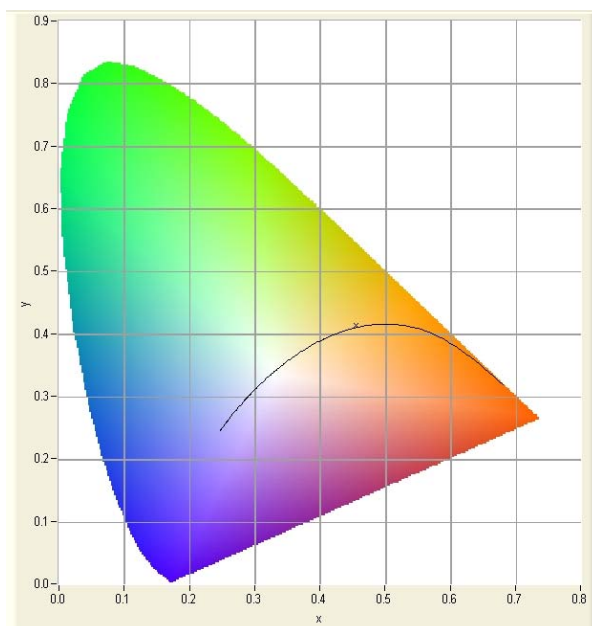

\* Valori indicati solo per le tonalità del bianco / for white tubes only / valeurs uniquement pour les tonalités du blanc

\*\* Solo per i tubi colorati / for coloured tubes only / uniquement pour les tubes colorés

Tubo in vetro al piombo diametro 15 mm - corrente 50 mA

Lead glass tube diameter 15 mm – current 50 mA

Tube au plomb diamètre 15 mm – courant 50 mA

I dati qui riportati hanno valore indicativo e non costituiscono impegno da parte nostra né garanzia alcuna.

The above data are indicative and do not constitute engagement neither guarantee from our side.

Les valeurs indiquées sont indicatifs et ne peuvent pas constituer un engagement de notre part.